

RM 8110

Interroll Roller Conveyor

Straight

Non-Powered




Product Description
The non-powered straight roller conveyor transports materials either manually or via gravity down a slope and is used as an assembly and picking line.

The Magnetic Speed Controller 50 can be installed for controlled speed regulation. These gearless, mechanical eddy current brakes reliably decelerate materials from 0.5 kg up to 35 kg, and increase functionality and safety in the workplace. For more information, please contact your Interroll contact person.

Technical data

General technical data	Max. load capacity	100 kg/m
	Incline/decline	Suitable for slopes
	Ambient temperature	-5 to +40 °C
Roller	Roller type	Interroll Series 1100, Smooth-Running Conveyor Roller Interroll Series 1700, Universal Conveyor Roller
	Roller diameter	50 mm
	Roller material	Steel, zinc-plated
		PVC

Dimensions

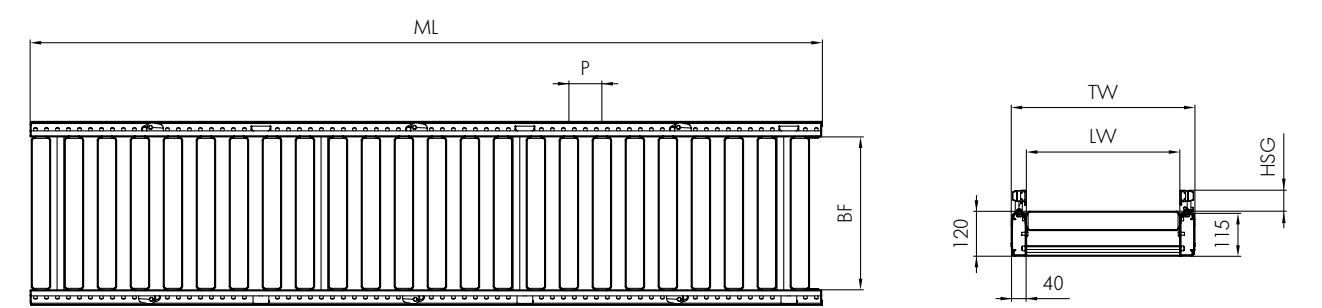

BF	Between frames	420, 620, 840 mm others on request
LW	Lane width	BF (+ 120/-90 mm per side with flexible side guide)
ML	Module length	Max. 4080 mm
TW	Module width	BF + 80 mm
P	Roller pitch	60/90/120 mm
HSG	Height side guide	35 - 65 mm

- Scope of supply**
- The module is fully assembled
 - Please order support stands and end caps separately
 - Please order the Magnetic Speed Controller 50 separately