

OMNIMAT MODULE 2800

For switchblades and intersections



Other Conveying
Elements
OmniWheels

Customer
benefits

- Conveyance possible in every direction
- Lateral dovetail profiles for a fixed, form-fit join

Applications

- Humid environment

Properties

- Corrosion-proof
- Equipped with a pair of OmniWheels Series 2500 (Ø 48 mm) and stainless steel shaft (Ø 8 mm)


Design
information

- Level, stable base required on material to be conveyed

Technical Data

General technical data	
Max. load capacity	50 N
Bearing	Slide bearing
Housing material	Polypropylene

Dimensions

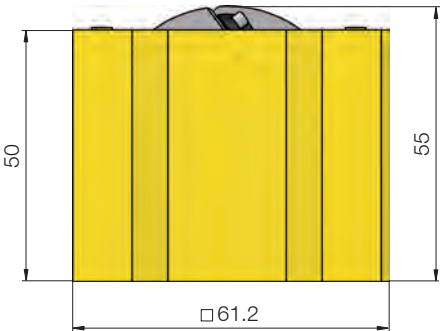

Reference number: 2800