
Product overview



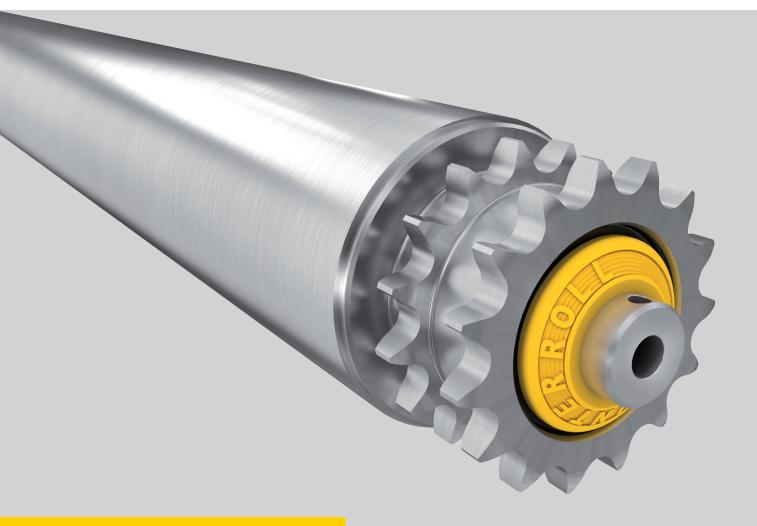

Interroll Pallet Drive Compact Drive for Pallet Conveyors

INSPIRED BY EFFICIENCY

Technical Data		
Motor diameter	80 mm	89 mm
Max. speed	Up to 0.2 m/s	Up to 0.22 m/s
Sprockets	Z15 and z18	
EL min/max	500-1,500 mm	
Power	70 W S3 50%	
Torque	22 Nm	
Load	Up to 1,250 kg	
Throughput	120 Pallets / hour	
Ambient temperature	-5° C to + 40°C	



With the new space saving Interroll Pallet Drive, design and installation of the driven pallet conveyors is very easy. It is the perfect single-zone drive solution for efficient space utilization.

The high-performance asynchronous drum motor with robust multi-stage planetary gear is integrated into the Interroll Roller based on Series 3950 and is applicable for loads of up to 1,250 kg per zone.

Construction of pallet conveyors requires minimal engineering: There is no need for complex motor stations; the pallet rollers are driven roller-to-roller. This compact and maintenance-free solution can be mounted directly on the floor.

- Compact and space saving design
- Maintenance free
- Floor mounting possible



