

SANITARY PUMPS



1.Quick dismantling

The clamp system ensures rapid dismantling without any tools.

2.Plain surface

The sandwich diaphragm has a completely plain surface, which eliminates bacteria growth problems. The diaphragm is available in food grade material - pure TFM (PTFE).

3.Superior finish

Both liquid side and outside is electropolished to obtain superior finish and hygiene. Special surface finish may be done according to your requirements.


4.Pollution-free air valve

The sealing system is lubrication-free, always keeping your product and environment free from oil contamination.



AISI 316L POLISHED - HYGIENIC PUMP

DIMENSIONAL DRAWING

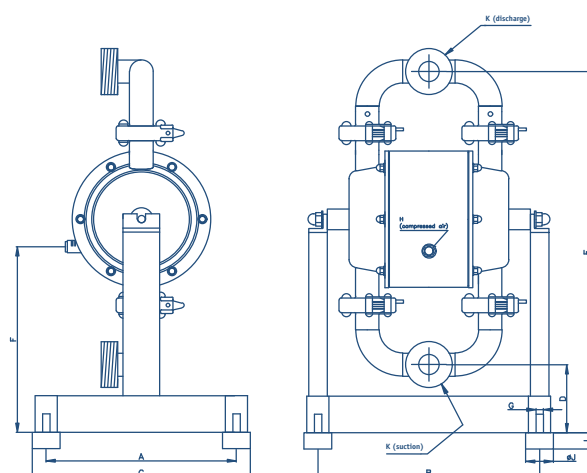

Hygienic design made from electropolished stainless steel to meet the requirements in hygienic installations.

DIMENSIONS	A	B	C	D	E	F	G	H	I	ØJ	K		
											TC	DN	SMS
DM 15/30	103	116	142	46	282	162	M8	R 1/4"	18	30	1/2"	15	-
DM 25/75	206	240	230	75	394	205	M8	R 1/4"	18	30	1"	25	25
DM 40/125	226	257	250	77	423	221	M8	R 1/4"	18	30	1 1/2"	40	38
DM 50/315	326	357	350	102	640	247	M8	R 1/2"	18	30	2"	50	51
DM 65/565	326	435	350	123	845	357	M8	R 1/2"	18	30	2 1/2"	65	63,5

TECHNICAL DATA

	15/30	25/75	40/125	50/315	65/565
Max capacity (l/min)	30	75	125	315	565
Max pressure (bar)	8				
Nominal port size	DN 15	DN 25	DN 40	DN 50	DN 65
Optional connections	DIN 11850 standard, Tri-Clamp, SMS				
Air connection	R 1/4"	R 1/4"	R 1/4"	R 1/2"	R 1/2"
Suction lift dry (mWC)	2	3	4	4	5
Suction lift wet (mWC)	9				
Max diameter solids (mm)	4	5	8	11	14
Temperature limits - NBR, EPDM (°C)	80				
Temperature limits - PTFE (°C)	120				
Weight (kg)	5	8	11	26	34
Material of pump housing	AISI 316L				
Material of centre housing	PE, PE conductive				
Diaphragm options	NBR, EPDM or TFM/PTFE				
Valve balls	NBR, EPDM, PTFE, AISI 316				
Gaskets	Silicone, PTFE, EPDM, NBR				

The above figures represent EPDM-fitted pump capabilities.
It can vary for PTFE-fitted diaphragm.

Sanitary series

Sanitary series is particularly designed to meet the requirements of the food, beverage, pharmaceutical and cosmetic industries. Lubrication-free air distribution system, maintenance-free ball check valve system and total visual inspection of the wetted parts are some of the major features for this pump series.


Made to be clean

Our design allows for total visual inspection of the wetted parts. There are no hidden areas where bacteria can grow. The manifold clamps and the housing screws are simply removed for complete disassembly and cleaning. The pump is also designed for cleaning and sterilization in place – C.I.P. and S.I.P. After such operations, the pump is easily turned in its support for drainage.

SPECIAL VERSIONS

TROLLEY FOR PUMP

Make your DELLMECO pump mobile. The trolley is available for all pump sizes.

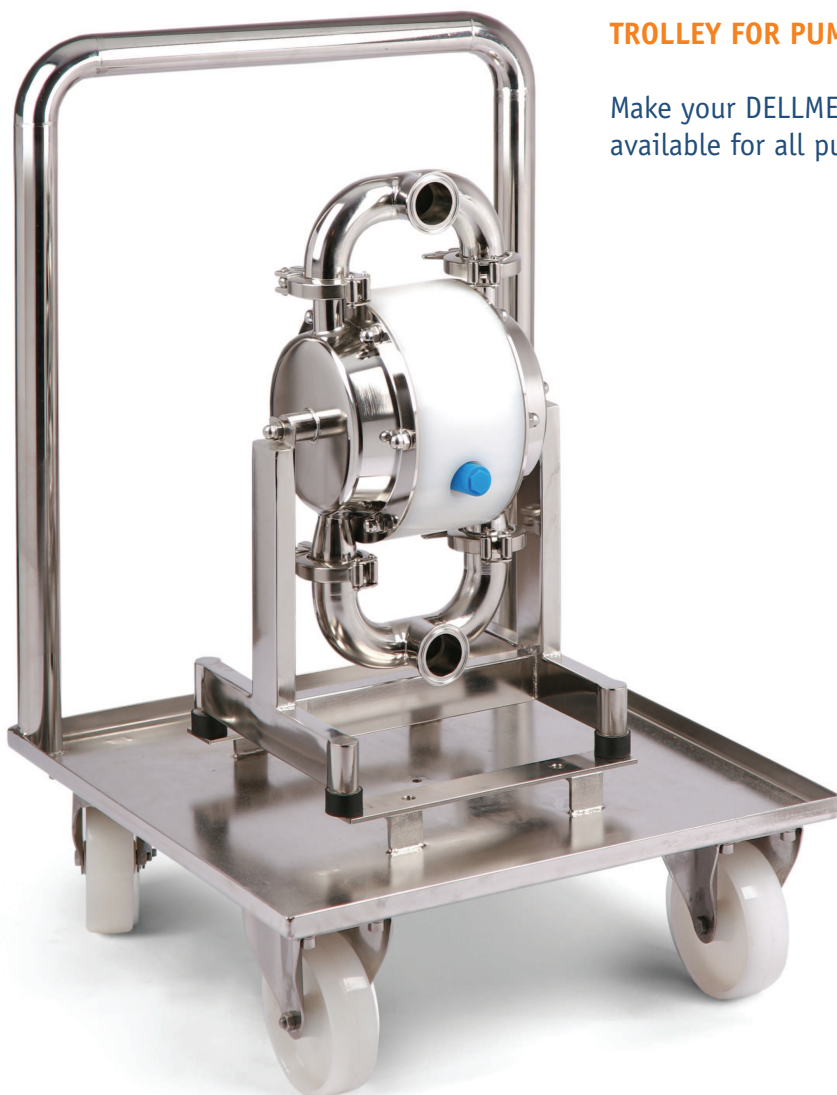

HEATING JACKET


The heating jacket is used when the pumped product has to maintain a specific temperature, high or low, throughout the process. A heating or cooling medium is continuously circulated in the heating jacket. The jacket is covering all the wetted parts of the pump. Available on all sanitary series pumps.




VARIETY OF CONNECTION TYPES

The pump is supplied as standard with connections according to DIN 11850. However, the pump may be equipped with almost any type of connection used in the hygienic field – TriClamp, SMS, RJT, ANSI etc.


DM 15/30

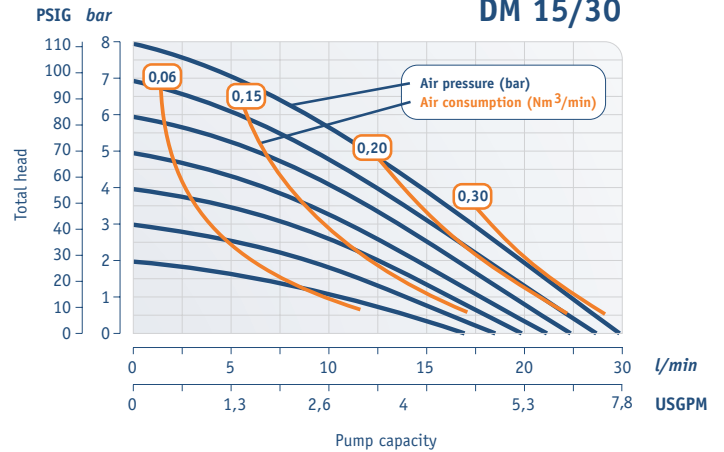


DM 25/75

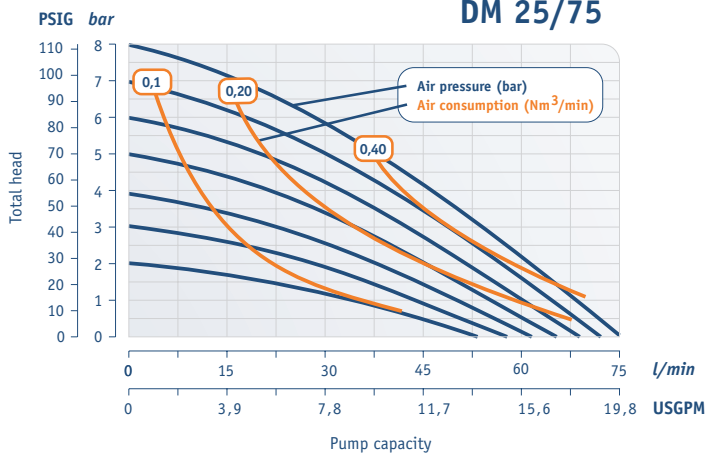

DM 40/125

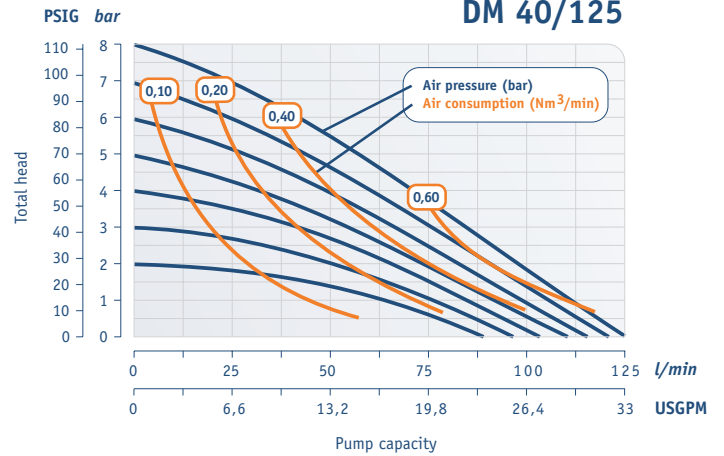

DM 50/315

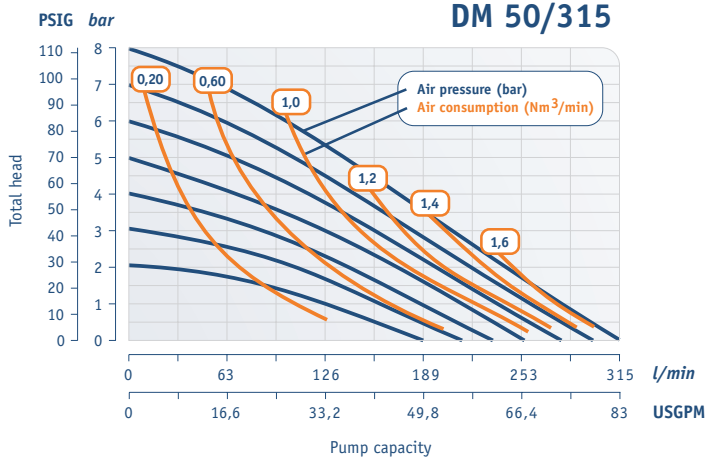

DM 65/565

