

iMOT17xB XM-CAN INTELLIGENT SERVO MOTOR SIZE 17

BRUSHLESS MOTORS WITH INTEGRATED DRIVE AND MOTION CONTROLLER

The iMOT17xB XM-CAN represents the newest family of the Technosoft intelligent brushless servo motors that combine motion controller, drive, encoder and motor into a single compact package in the NEMA17 size (42x42 mm).


The iMOT17xB series represents a cost-effective, compact solution specifically targeted to those distributed motion control applications where the elimination of the cabling between motor, sensor and drive is the success factor.

As an intelligent motor, the iMOT17xB XM-CAN is empowered by the extreme flexibility offered by the TML (Technosoft Motion Language) instruction set. Acting as a programmable motion controller, drive and motor in a compact form, the unit can replace the host in various single or multi-axis stand-alone applications.

DISTRIBUTED CONTROL

Complex motion sequences, advanced positioning profiles like PVT or electronic camming, I/O and program flow control, data transfer between axes, subroutines, ISRs and multiple homing modes ease the motion application implementation task.

In systems that require a host, the iMOT17xB XM-CAN operates as an intelligent slave executing motion sequences triggered via commands received on RS-232 or TMLCAN while fully supporting as well the CiA402 CANopen drive profile.

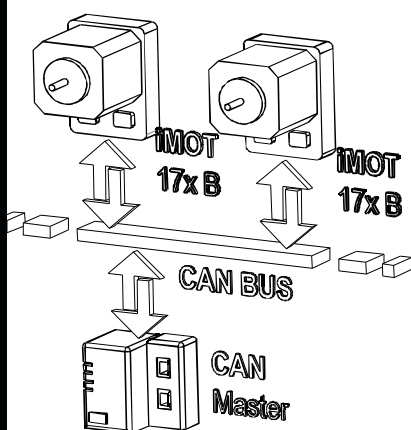

TYPICAL APPLICATIONS

- Systems with distributed motor control intelligence
- Packaging
- Printing
- Textile
- Medical
- Handling
- Labeling
- Pick and place
- Factory automation



FEATURES :





- Fully digital intelligent brushless servo motor with embedded motion controller, drive and absolute position sensor
- Available in 3 motor lengths, offering 100, 200 and 300 mNm of continuous torque
- Cost effective positioning system, due to compactness and elimination of motor wiring
- Advanced motion control capabilities (PVT, S-curve, electronic cam)
- Motion programming via TML (Technosoft Motion Language) or motion libraries for Visual
- C / VB / LabVIEW / Linux and PLC
- Standalone operation with stored motion sequences
- Motor supply: 12-48V; Logic supply: 12-36V
- Communication:
 - CAN-Bus with TMLCAN protocol or
 - CANopen protocol (CiA301 and 402)
- Digital and analogue I/Os:
 - 5 programmable PNP/NPN digital inputs
 - 2 digital outputs, 0 - 5V, 0.5A
 - 1 analogue input: 12 bits resolution, 0-5 V
- Feedback device:
 - Absolute single-turn position sensor offering a resolution of 4096 counts / revolution
- 16 h/w addresses selectable by hex switch
- Programmable protections:
 - Over-current, over-temperature, short circuit
 - Over and undervoltage, i2t, control error

Your
Next
Intelligent
Move



TECHNOSOFT
MOTION TECHNOLOGY

TECHNICAL AND ORDERING INFORMATION

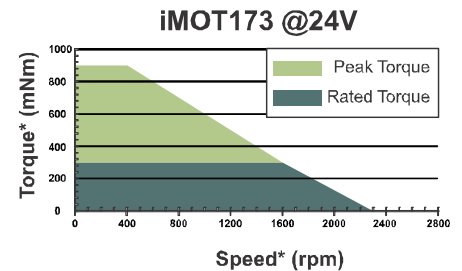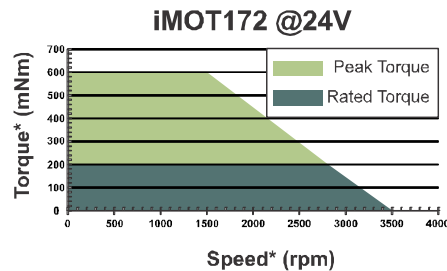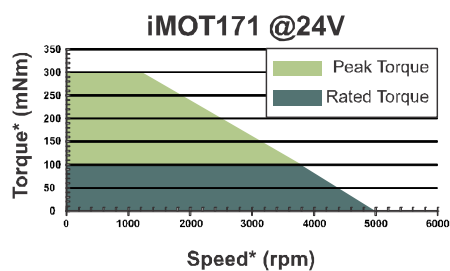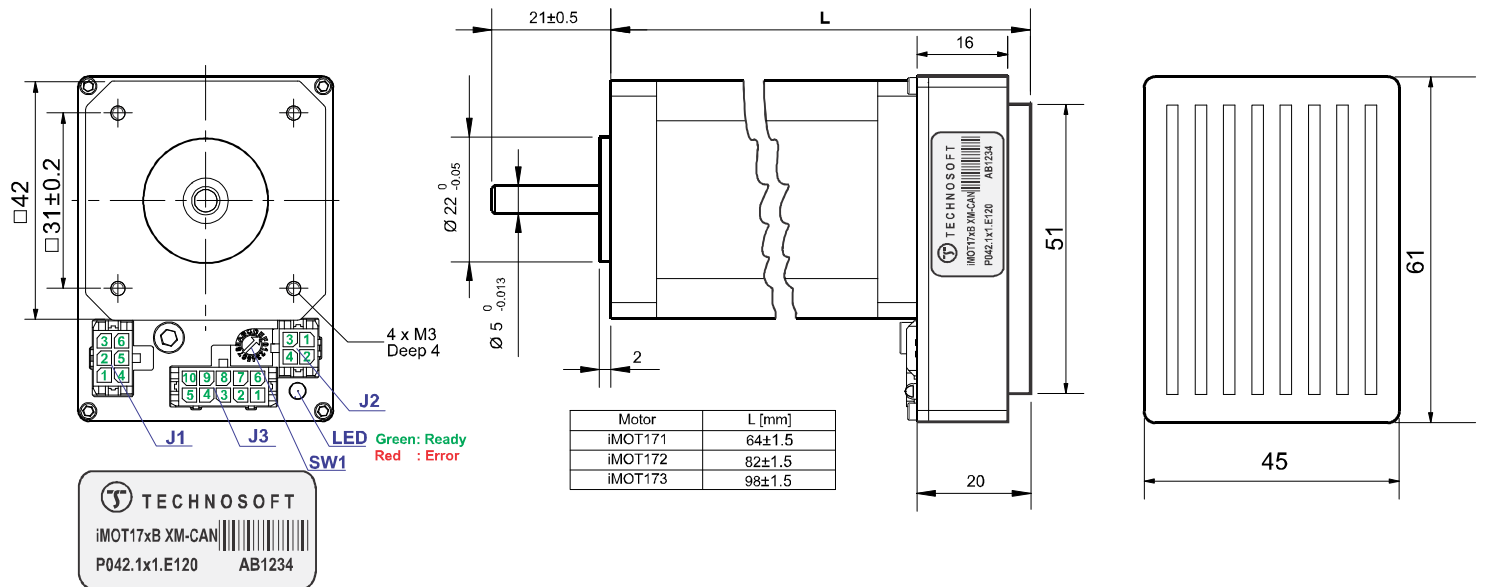

* ALL VALUES ±10%

EASYSOFT STUDIO


A graphical development platform, for configuration, parameterization and programming of the drive, through

- Motion system set-up wizard
- Tuning assistance
- Automatic TML code generation capability
- Definition, programming and testing of motion sequences
- Advanced data logging and customizable control panels

MOTION CONTROL LIBRARIES

The TML_LIB Motion Control Libraries can be used to implement a motion control application on a PC from Visual C / C++, C#, Visual Basic, Delphi or LabVIEW under Windows or Linux operating systems.

If a PLC is used as host, implementations of the TML_LIB according with IEC-61131 standard are available for Siemens, B&R and Omron PLCs.



Application notes with TML program examples at : www.technosoftmotion.com

ORDERING INFORMATIONS * :

P042.111.E120	iMOT171B XM-CAN Intelligent Brushless Motor, CAN
P042.121.E120	iMOT172B XM-CAN Intelligent Brushless Motor, CAN
P042.131.E120	iMOT173B XM-CAN Intelligent Brushless Motor, CAN
P034.001.E002	EasyMotion Studio Software
P040.001.Exxx	TML_LIB Motion Library
P038.040.C099	Complete cable set 100 cm for iMOT17xB XM-CAN
P038.040.C079	Housing & crimp pins set for iMOT17xB XM-CAN

*Other communication buses available upon request

iMOT17xB INTELLIGENT SERVO MOTOR FAMILY SPECIFICATIONS :

ELECTRICAL SPECIFICATIONS	Units	iMOT171B	iMOT172B	iMOT173B
Rated torque	mNm	100	200	300
Peak torque	mNm	300	600	900
Rotor Inertia	g.cm ²	29	59	89
Speed Range (@ 24Vdc)	rpm	0 - 5000	0 - 3500	0 - 2300
Encoder resolution	counts/rev		4096	
Logic Power Supply input	V		12-36	
Motor Power Supply input	V		12-48	
Ambient operating temperature	°C		0-40	
Isolation rating			IP40	

MECHANICAL SPECIFICATIONS *Units iMOT171B iMOT172B iMOT173B

Flange and Shaft	NEMA17 compatible, front 42 x 42mm, 5mm shaft			
Frame size	mm	42 x 42; 45 x 61 in connectors area		
Length	mm +/-1.5	59	79	99
Weight	g	395	515	720

*Other mechanical configurations, with adapted gearboxes are available upon request

MATING CONNECTORS :

J1	Molex 2X3 MiniFit 43045-0600
J2	Molex 2X2 MiniFit 43045-0400
J3	Molex 2X5 MiniFit 43045-1000
Crimp pins	Molex 04303 0-0007

SALES OFFICES

HEADQUARTERS :

SWITZERLAND

Tel.: +41 32 732 55 00

Fax: +41 32 732 55 04

sales@technosoftmotion.com

GERMANY

(Postcode: 2, 3, 4, 5, 6, 7)

Cell: +49 (0)173 77 200 03

Tel.: +49 (0)7156 3088018

Fax: +41 (0)32 732 55 04

sales.de@technosoftmotion.com

GERMANY (Postcode: 0, 1, 8, 9) / AUSTRIA

Cell: +49 (0)170 521 0007

Tel.: +49 (0)83319247293

Fax: +41 (0)32 732 55 04

sales.de@technosoftmotion.com

BENELUX

Tel.: +32 (0)14 21 13 21

Fax: +32 (0)14 21 13 23

sales.be@technosoftmotion.com

EASTERNEUROPE

Tel.: +40 (0)21 425 90 95

Fax: +40 (0)21 425 90 97

sales.ro@technosoftmotion.com

UNITED STATES

Tel.: +1 734 667 52 75

Fax: +1 734 667 52 76

sales.us@technosoftmotion.com

www.technosoftmotion.com