

APOLLO PRO MR 336



APOLLO PRO MR 640



APOLLO PRO LR 640

THERMAL CLIP-ON SYSTEM

FLIR APOLLO PRO®

The Apollo PRO is an uncooled long-wave thermal clip-on device intended to mount in front of the existing magnified day sight. The immediate advantages of this approach of converting the day scope into a thermal imaging device include no change in cheek weld, no change in trigger reach, and continued use of existing ballistic reticules in the day scope. The 24/7 mission capability is only one of the strengths of the Apollo PRO.

www.flir.com



EXCEPTIONAL VISION

Advanced image processing eliminates the guesswork

- Completely digital for better detection, classification and recovery, day or night
- Built using the FLIR Tau 2 thermal core
- Bright, high definition AMOLED SVGA display for absolute clarity



COMPACT, POWERFUL

Perfect balance of size and performance

- Powerful and compact hardware is protected by a robust body
- Featuring a 17 μm pixel pitch and on-chip image processing
- Outstanding thermal image quality in the darkness or through smoke, haze, fog, rain




SUPERIOR VALUE

Packed with features for a versatile and customizable viewing experience



- Mounts in front of any day scope with no re-zeroing required
- Multiple color palettes
- Digital compass/inclinometer for precise range and target orientation

SPECIFICATIONS



General	Apollo PRO MR 336	Apollo PRO MR 640	Apollo PRO LR 640
Detector type	336 x 256 VOx Microbolometer	640 x 512 VOx Microbolometer	640 x 512 VOx Microbolometer
Refresh rate		30 or 60 Hz	
Start up		3 seconds	
Lens system	50 mm; F/1.4	50 mm; F/1.4	100 mm; F/1.4
Optical magnification	1x	1x	1x
Field of view (H x V)	6.5° x 5°	12.5° x 10°	6.2° x 5°
Digital zoom	2x, 4x	2x, 4x, 8x	2x, 4x, 8x
Exit pupil diameter	40 mm	25 mm	40 mm
Focusing range	5 m to infinity	5 m to infinity	10 m to infinity
Display	AMOLED SVGA 060		
Video output	PAL (768x574 pixels)/ NTSC (640x480 pixels)		
Temperature Imaging Modes (Image Palettes)	White Hot, Black Hot, Sepia, Fusion, Rainbow, and Rain		
Reticle type	6-Pattern Digitally controlled: Dot 4 MOA, Line Dot, Cross Center Dot, Cross, Crosshair, and “No Reticle”		
Reticle color	Black, White, Red, Cyan		
Boresight adjustment type	Digitally controlled		
User interface			
Operation switch	On/ Off/ Standby mode		
Control panel buttons	Configures operational settings: <ul style="list-style-type: none">• Display brightness control• Image palette control• Digital zoom control• Reticle color control• Reticle pattern control• Boresighting adjustment• On-screen menu navigation		
Remote control button	Activates/ deactivates the Apollo PRO in standby mode		
Focus ring	Adjusts the objective diopter		
Interfacing			
Connector	Power in, analog video in/out, digital video recorder		
Power			
Battery type	Four CR123A 3V Lithium batteries or four AA 1.5V		
Battery life (operating)	Up to 7 hrs (up to 14 hrs with optional battery pack) at 20°C		
Environmental			
Operating temperature range	-20°C to +50°C (-4°F to +122°F)		
Storage temperature range	-40°C to +60°C (-40°F to +140°F)		
Physical			
Weight	1.05 kg (2.3 lbs)	0.95 kg (2.0 lbs)	1.28 kg (2.8 lbs)
Overall dimensions	226 x 76 x 74mm (8.9 x 3.0 x 2.9 in)	215 x 76 x 74mm (8.5 x 3.0 x 2.9 in)	287 x 90 x 100mm (11.3 x 3.5 x 3.9 in)
Dimensions w/o lens caps	226 x 76 x 74mm (8.9 x 3.0 x 2.9 in)	215 x 76 x 74mm (8.5 x 3.0 x 2.9 in)	287 x 90 x 100mm (11.3 x 3.5 x 3.9 in)
Package Includes			
Thermal Clip-On, Battery Cartridge for AA Batteries, Battery Box Extender Ring, Video Cable, Light Suppressor, Wireless Remote Control with Picatinny Adapter, Quick Start Guide, Soft Carrying Case, Lens Cloth			
Optional Accessories			
ATVR000002 – Wireless Head Mounted Display			
ANAM000045 – Extended Rail Adapter #85			
IATAM000005 – HD DVR - High-Definition Digital Recorder			
ATAM000008 – Extended Battery Pack			
ANH0000001 – Hard Shipping/ Storage Case #101			

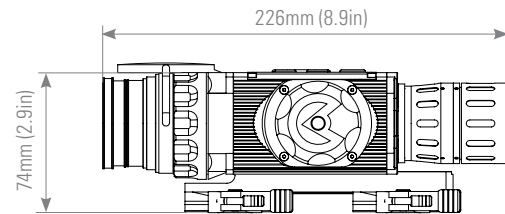


Apollo PRO MR 336

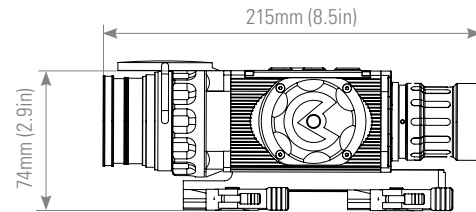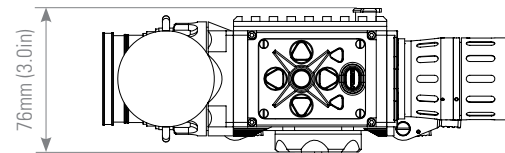

Apollo PRO MR 640

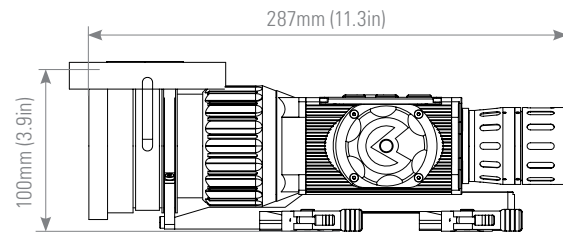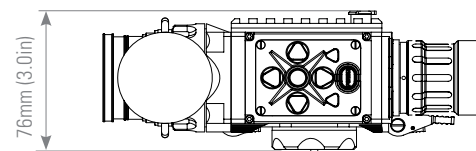

Apollo PRO LR 640

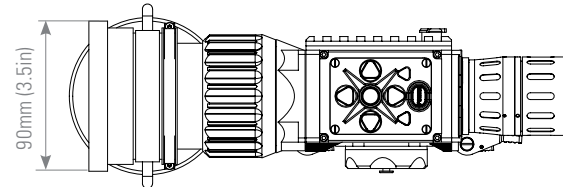

Specifications are subject to change without notice.
For the most up-to-date specs, go to www.flir.com

FLIR OUTDOOR & TACTICAL SYSTEMS

9 Townsend West,
Nashua, NH 03063

Phone: 1-888-959-2259
or (603) 324-7600
Fax: 1-888-959-2260

FLIR PRODUCT REPAIR CENTER

email: US_CBUrepair@flir.com
Register on: customer.flir.com

ORDER PLACEMENT, RETURN TO STOCK & INQUIRIES

email: OTS-Orders@flir.com

PRODUCT REGISTRATION

flir.com/support-center/support-hq/

TECHNICAL SUPPORT

email: US_CBUsupport@flir.com

www.flir.com
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice, check our website: www.flir.com
©2018 FLIR Systems, Inc. All rights reserved.
Updated 11/22/2018

18-2292-OTS



The World's Sixth Sense™