


MADE IN GERMANY



PAS

Photoacoustic gas Sensor
Ammonia NH₃
200 ppm
smartGAS item number: PA-242204-00000

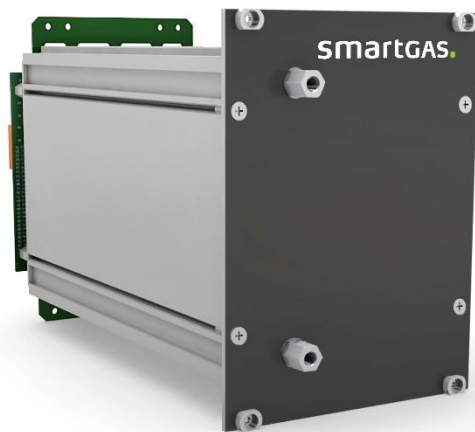

- Self-controlled or partially control via a connected PLC
- Compact Design
- Zero-calibration by external command or automatic
- Measured values continuously accessible via UART data stream
- Status indicated by LED
- Automatic compensation of the water vapor cross-sensitivity
- Designed for 24/7 operation

Application examples

Gas analysis
Biogas application
Environmental monitoring
Process control
Emission monitoring

Available equipment

Gas cooler
Particle filter
Gas pump
Mounting equipment
Galvanically isolated output

Available design in support

Mechanical Installation
Data communication
Gas pre-treatment

General features

Measurement principle:	Photoacoustic
Measurement range:	0 ... 200 ppm Full Scale (FS)
Gas supply:	by flow (nearly atmospheric pressure)
Flow rate:	0.1 ... 2.0 l / min
Mounting dimensions:	127 mm x 96.5 mm x 200 mm (L x W x H)
Warm-up time:	≤ 10 minutes

Measuring response*

Digital resolution:	0.1 ppm
Detection limit (3 σ):	≤ 1 ppm
Repeatability:	≤ 1% of measured value plus ± 1 ppm
Long term stability (zero):	≤ ± 1ppm over 24 h period
Long term stability (span):	≤ 1% of value ± 2ppm over 24 h period

Electrical parameters

Power Supply	12 Volts DC ± 1%
Power consumption:	10 minute heat up approx.45 Watts / Operation approx. 15 Watts
Communication:	TTL-UART and digital I/O's
Calibration:	Zero-calibration by external command or automatic

Climatic conditions

Operating temperature:	+10°C – +40 °C
Storage temperature:	+10°C – +40 °C
Air pressure:	800 – 1150 hPa
Ambient humidity:	0 – 95 % relative humidity (not condensing); Housing has to be purged with dry air or nitrogen.

* Typical values related to 1013 hPa, Ta = 0 °C, flow = 0.7 l / min for dry (not condensing) and clean sample gas. Stated values exclude calibration gas tolerance.

** Adjustable only via smartGAS Calibration-Tool SW.

All rights reserved. Any logos and/or product names are trademarks of smartGAS. The reproduction, transfer, distribution or storage of information contained in this brochure in any form without the prior written consent of smartGAS is strictly prohibited. All specifications – technical included – are subject to change without notice. Depending on the application, the target gas and the measurement range the technical data may differ. No liability is accepted for any consequential losses, injury or damage resulting from the use of this document or from any omissions or errors herein. The data is given for guidance only. It does not constitute a specification or an offer for sale.

For more information, please visit www.smartgas.eu or contact us at sales@smartgas.eu

Please consult smartGAS sales for parts specified with other temperature and measurement ranges. At first initiation and depending on application and ambient conditions recalibration is recommended. Recurring cycles of recalibration are recommended.