

SC2750UD-MV/SC3150UD-MV/ SC3450UD-MV

Power Conversion System



HIGH YIELD

- Advanced three-level technology, max. efficiency 99%
- Effective forced air cooling, no derating up to 45°C
- Wide DC voltage operation window, full power operation at 1500V



SMART O&M

- Modular design, easy for maintenance
- IP65 protection degree, easy for outdoor installation
- Optional C5 anti-corrosion degree, adjust to applications close to the sea



FLEXIBLE APPLICATION


- Bidirectional power conversion system with full four-quadrant operation
- Compatible with high voltage battery system, low system cost
- Battery charge & dis-charge management and black start function integrated



GRID SUPPORT

- Compliant with CE, IEC 62477, IEC 61000 and grid regulations
- Fast active/reactive power response
- L/HVRT, L/HFRT, soft start/stop, specified power factor control and reactive power support

CIRCUIT DIAGRAM

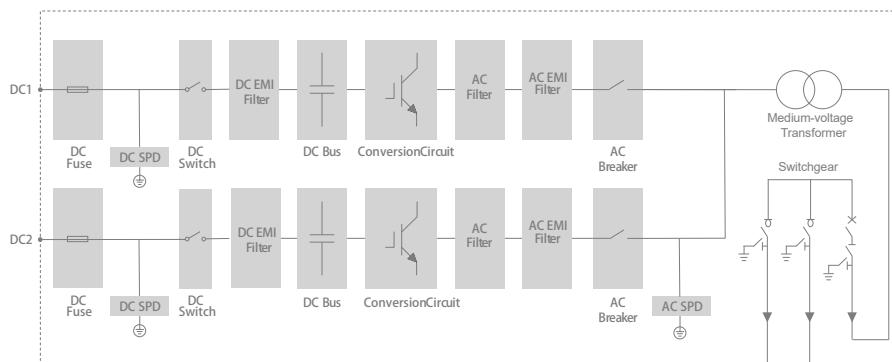

| System Type | SC2750UD-MV | SC3150UD-MV | SC3450UD-MV |
|---|--------------------------------------|--|--------------------------------------|
| DC side | | | |
| Max. DC voltage | | 1500 V | |
| Min. DC voltage | 800 V | 915 V | 1000 V |
| DC voltage range | 800 – 1500 V | 915 – 1500 V | 1000 – 1500 V |
| Max. DC current | | 1935 A * 2 | |
| No. of DC inputs | | 2 | |
| AC side (Grid) | | | |
| AC output power | 2750 kVA @ 45 °C 3025 kVA @ 30 °C | 3150 kVA @ 45 °C 3465 kVA @ 30 °C | 3450 kVA @ 45 °C 3795 kVA @ 30 °C |
| Max. AC output current | | 3174 A | |
| Nominal AC voltage | 550 V | 630 V | 690 V |
| AC voltage range | 484 – 605 V | 554 – 693 V | 607 – 759 V |
| Nominal grid frequency / Grid frequency range | | 50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz | |
| Harmonic (THD) | | < 3 % (at nominal power) | |
| Power factor at nominal power / Adjustable power factor | | >0.99 / 1 leading – 1 lagging | |
| Adjustable reactive power range | | -100 % – 100 % | |
| Feed-in phases / AC connection | | 3 / 3-PE | |
| AC side (Off-Grid) | | | |
| Inverter port nominal AC voltage | 550 V | 630 V | 690 V |
| Inverter port AC voltage range | 484 – 605 V | 554 – 693 V | 607 – 759 V |
| AC voltage distortion | | < 3 % (Linear load) | |
| DC voltage component | | < 0.5 % Un (Linear balance load) | |
| Unbalance load capacity | | 100% | |
| Nominal Voltage frequency / Voltage frequency range | | 50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz | |
| Efficiency | | | |
| Inverter Max. efficiency | | 99.0 % | |
| Transformer | | | |
| Transformer rated power | 2750 kVA | 3150 kVA | 3450 kVA |
| Transformer max. power | 3025 kVA | 3465 kVA | 3795 kVA |
| LV / MV voltage | 0.55 kV / (20 – 35) kV | 0.63 kV / (20 – 35) kV | 0.69 kV / (20 – 35) kV |
| Transformer vector | | Dy11 | |
| Transformer cooling type | | ONAN | |
| Oil type | | Mineral oil (PCB free) or degradable oil on request | |
| Protection | | | |
| DC input protection | | Load break switch + fuse | |
| Inverter output protection | | Circuit breaker | |
| AC output protection | | Circuit breaker | |
| Surge protection | | DC Type II / AC Type II | |
| Grid monitoring / Ground fault monitoring | | Yes / Yes | |
| Insulation monitoring | | Yes | |
| Overheat protection | | Yes | |
| General Data | | | |
| Dimensions (W*H*D) | | 6058*2896*2438 mm | |
| Weight | | 16000 kg | |
| Degree of protection | | IP54 (Inverter: IP65) | |
| Operating ambient temperature range | | -35 to 60 °C (> 45 °C derating) | |
| Allowable relative humidity range | | 0 – 100 % | |
| Cooling method | | Temperature controlled forced air cooling | |
| Max. operating altitude | | 1000 m (Standard) / > 1000 m (Optional) | |
| Display | | LED, WEB HMI | |
| Communication | | RS485, CAN, Ethernet | |
| Compliance | | CE, IEC 62477-1, IEC 61000-6-2, IEC61000-6-4 | |
| Grid support | | L/HVRT, L/HVRT, active & reactive power control and power ramp rate control, Volt-var, Volt-watt, Frequency-watt | |