


# BKG® BlueFlow™ Gear Pump

## EP-SE / EP-SF (Extrusion Pump)

BKG BlueFlow Gear Pumps type EP-SE / EP-SF are used in extrusion, compounding and polymerization processes.

The gear pump helps optimize the process, so the extrusion line produces optimal quality with the highest throughput possible. The gear pump has a rheologically optimized inlet and outlet geometry to guarantee a very controlled transport of the material. Temperature and pressure sensor ports are included in the pump housing.

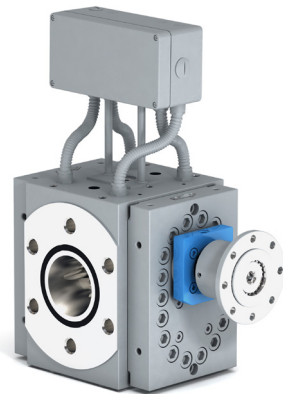

### Features

<b>Type:</b>	<b>EP-SE</b>
Application:	Standard polymers, low viscosity plastics, e.g. PET, PA 6
Feature:	Cooled sealing system
<b>Type:</b>	<b>EP-SF</b>
Application:	Provides the same advantages as the EP-SE model with the additional benefit of heating the pump with a fluid

### Old vs. New

- Higher specific volume in a smaller housing
- Metric system
- Two melt immersion points inlet/outlet
- Different shaft sealings available: air or fluid cooling, finned seal and dynamic seal

### Benefits

- Reduction of stress on the extruder by means of shifting the job of building pressure to the gear pump
- Reducing extruder head pressure may yield increased throughput rate leading to maximized production efficiency
  - Elimination of output variations and pressure pulsations
  - Improves product quality
  - Reduces scrap and product defects
  - Saves polymer usage
- Allows the use of up to 100% regrind in production with consistent metering
- Improvement of the dimensional accuracy in the production of sheets and profiles
- Optimizes the surface and optical quality in the production of films, sheets and profiles
- Increased product quality in homogeneity and pellet size in compounding applications

### Technical Information

Size	33 - 3201
Throughput*	7 – 12,700 kg / hr (15 – 28,000 lbs / hr)
Specific volume	33 – 3201 cm³ / rev (2.02 – 195.3 in³ / rev)
Viscosity	200 – 30,000 Pas
Temperature	Up to 350°C (662°F)
Heating	Electric or Fluid
Pump outlet	max. 350 bar (5,076 psi)
Differential pressure	max. 250 bar (3,626 psi)

\* Higher or lower throughputs on request.

**Nordson PPS GmbH**  
Coermühle 1  
48157 Münster / Germany  
+49.251.21405.0 **Phone**

**USA**  
+1.828.326.9888 **Phone**

**China**  
+86.21.57850918 **Phone**

www.nordsonpolymerprocessing.com | info@nordsonpolymerprocessing.com  
© 2016 Nordson PPS GmbH  
Printed in Germany  
10/2016

