

A Series Low-level Order Picker

	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.
Distinguishing mark	1.2	Manufacturer's type designation		CID25-AC1-L
	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Order-picker
	1.5	Rated capacity/rated load	Q (kg)	2500
	1.6	Load centre distance	c (mm)	1200
	1.9	Wheelbase	y (mm)	2921
Weight	2.1	Service Weight	kg	1130
Tyres, chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		PU
	3.2	Tyre size, front		Φ230x75
	3.3	Tyre size, rear		Ф85х70
	3.4	Additional wheel (dimensions)		Φ125x50
	3.5	Wheels, number front / rear (x = driven wheels)		1x+2/4
	3.6	Tread, front	b10 (mm)	546
	3.7	Tread, rear	b11 (mm)	370
Dimensions	4.4	Lift	h₃ (mm)	125
	4.15	Fork height,lowered	h13 (mm)	85
	4.19	Overall length	lı (mm)	3730
	4.21	Overall width	b1(mm)	800
	4.22	Fork dimensions	s/e/l (mm)	64/170/2400
	4.25	Distance between fork-arms	bs (mm)	540
	4.32	Ground clerance,center of wheelbase	m2 (mm)	21
	4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	3930
	4.35	Turning radius	Wa (mm)	3130
Performance Data	5.1	Travel speed,laden/unladen	km/h	7.0/10
	5.2	Lift speed,laden/unladen	m/s	0.032/0.069
	5.3	Lowering speed,laden/unladen	m/s	0.042/0.033
	5.8	Max.Gradeability,laden/unladen	%	6/16
Electric Engine	6.1	Drive motor rating S2 60 min	kW	2.2
	6.2	Lift motor rating at S3 15%	kW	2.2
	6.4	Battery voltage,rated capacity	V/Ah	24/360
_		Battery voltage,rated capacity,Optional	V/Ah	~24/420
	8.1	Type of drive control		AC
	9.1	Manufacturer		CURTIS



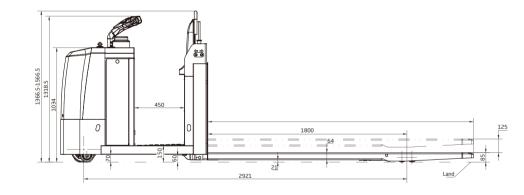

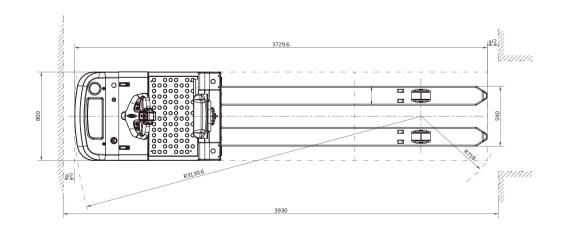

ZHEJIANG HANGCHA IMP. &EXP. CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com







YouTube










colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.

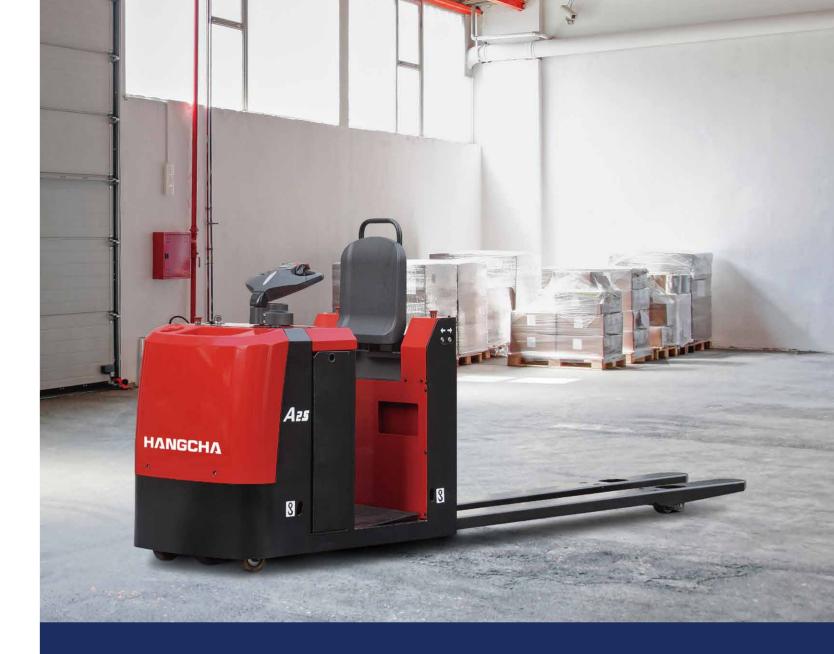

A Series Low-level Order Picker

with capacities of 2,500kg



A Series Low-level Order Picker



Environment/ Efficiency/ **Economy**

Appearance

- / A series low level order picker applied professional industrial design, stream lines, and compact, and fully ergonomic consideration, in line with the latest design
- / Applied steel stamping and injection molding processes for front and back guard, which is robust, durable, and also environmental compliance.

High Performance

- / Electric Power Steering(EPS) is standard specification, which provides flexible operation.
- / Double tray placed side by side design, more suitable for a large picking and transshipment.
- / The inching switches installed at the LH/RH side, greatly improve the ease of operation.
- / Powered by AC traction motor not only has good acceleration and climbing performance, but also low heat, brushless, maintenance-free.
- / Latest AC CURTIS control system, precise and smooth.
- / CAN-BUS connection enables all truck data can be read out for inspection, and also improves the data transition more quick and reliable.
- / All key parts such as hydraulic unit/ switches/ connector/ battery indicator and hour meter all adopt the famous brand.

Reliability

- / 5-pivot and low center of gravity design ensure the safe and reliability.
- / Imported waterproof connectors, all wires and cables are protected, greatly improve the reliability of the electric
- / Safety switch of pedal using non-contact proximity switch, improves safety and reliability.
- / The lift button with non-contact proximity switch for safe and reliable operation.
- / Top quality hydraulic power unit applied to provide low noise, low vibration, smooth lifting and landing reliable
- / Punch-formed forks provide more strength performance.
- / The charging plug is fixed on the chassis for avoid damage from battery installment.

Standard specification

- / AC traction motor
- / CURTIS AC controller
- / Imported hydraulic unit
- / Safety pedal & Rubber backrest
- / Side battery change
- / 3 emergency switches
- / 2 inch switches
- / Multi-function indicator
- / Tandem load wheels
- / Fork length --2400 mm
- / Outside fork width --540 mm
- / Electronic lifting limitation
- / Multi-function tiller with CAN-Bus system
- / Horn
- / EPS (Electric Power Steering)

- / The pedal applies shock absorption design, greatly improve the operator's comfort, reduce the fatigue.
- / New designed tiller is simple and beautiful, all the function can be operated by one hand.
- / Optimized designing structure to offer a good visibility and easy entrance of the pallet.
- / Small body with large arc design, more suitable for the truck in the centralized shelves. Chassis adopt wedge design, greatly increasing the passing ability.

Maintenance


- / AC motor without carbon brushes, maintenance-free,
- / Integrated battery indicator, hour meter and self-diagnostic instrument.

Options

- / Imported battery
- / Fork length --1150/1220/2150mm
- / Outside fork width --600/680mm
- / Charger
- / Load backrest
- / Guide roller







Safety

Comfort

- / Electronic speed control with automatic deceleration when steering angle increase.
- / Three braking system of regenerative braking, reverse current braking, parking brake, insures the safe opera-
- / Regenerative braking for battery recovery during travel speed reduction, anti-slope on gradient.