LOAD CARRIER











Helge**N**yberg

HELGE NYBERG AB HAS THE

Although all our customers have the same basic need for cost-effective, ergonomic material handling, their needs may differ on crucial points and key details. Moreover, different industries often have different laws and regulations for products, certifications or other industry-specific requirements.

For this reason, we have specialised in a number of areas on the basis of nearly 60 years' collective experience and knowledge of our customers' needs. This allows us to offer the optimum solutions, the best service and the most secure collaboration.

A SPECIALIST WITH SOLUTIONS FOR MANY SEGMENTS



INDUSTRY & MANUFACTURING

Helge Nyberg operates in both light and heavy industries. We have industrial solutions for the entire material flow.



E-COMMERCE & ORDER PICKING

With our long history and our location in a geographic area that is dense with mail order, and logistics and warehousing businesses, we have unique know-how and experience regarding order picking and third party logistics.



HEALTH CARE & HOSPITAL

All industries have different requirements and specifications regarding materials and professional equipment. The strictly regulated health care sector has certain specific requirements.

We can meet these requirements.



AUTOMOTIVE & VEHICLE

The development of smart logistics is perhaps most advanced in the automotive industry. Helge Nyberg's solutions are part of this development.



SERVICE & SUPPORT

Our truck and trolley solutions are not only ideal for transporting baggage or materials, for instance at airports and trade fairs. They are just as frequently used as wheeled service points by technicians and installers, for example in factories.



LEAN SOLUTIONS

As specialists, we are happy to help you develop the most resource-efficient solution to your material handling needs – the right material, in the right place at the right time.

SOLUTIONS TO YOUR NEEDS



TROLLEYS FOR TOWING TRACTORS

All our trolleys have 500 kg of loading capacity and contribute good ergonomics and high quality to the profitability of companies with internal handling of lighter goods.

p. 4-8



TROLLEYS FOR PICKING TRUCKS

The wide selection of trolleys and shelf sizes creates flexibility and makes it easy to customize the trolley to its task.

p. 9-21



TOWING DEVICES

Our trolleys are easily connected with a folded tow bar and tow hook that fits all Ergobjörn load carriers.

p. 22-23

CUSTOMISED TO YOUR NEEDS

TROLLEYS FOR TOWING TRUCKS

All our trolleys have a capacity of 500 kg. With their excellent ergonomics and high quality, they help improve the profitability of companies that handle light goods in-house. Thanks to a wide range of wheel types, shelf sizes etc., the trolleys are extremely flexible and easy to adapt to the job at hand. By combining them with smart accessories, they can be customised to suit most needs.

A shelf edge and an end grid keep the load firmly in place at all times. Tow bar and tow hook included. Chassis of 22 mm round, shiny zinc-coated tubing. 12 mm shelves with light grey laminate finish. Continuously height-adjustable handles made of powder-coated 22 mm tubing.





SHELF TROLLEY

The ends and shelves are reinforced to withstand loads up to 500 kg. The end uprights are held together by a top element. Lower shelf is recessed in the frame profile. Shelves reinforced with shelf supports. Upper shelves are continuously height-adjustable. Upper shelves have a 25x20 mm edge profile that creates a 10 mm high edge along the lateral sides. Max. load 500 kg. Lower shelf has a max. load of 500 kg.

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15250680	2	800x600	1000	650	1180
15251680	2	1000x600	1200	650	1180
15252680	2	1200x600	1400	650	1180
15253680	2	1230x600	1430	650	1180
15254680	2	1400x600	1600	650	1180
15256680	2	1600x600	1800	650	1180
15251880	2	1000x800	1200	850	1180
15252880	2	1200x800	1400	850	1180
15253880	2	1230x800	1430	850	1180
15254880	2	1400x800	1600	850	1180
15256880	2	1600x800	1800	850	1180



Upper shelves have a max. load of 150 kg. Two fixed wheels and two swivel wheels with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Model 25 – low ends, 2 shelves Model 27 – high ends, 3 shelves

Art. no.	Shelves	Shelf dim.	Length	Width	Höjd
15270680	3	800x600	1000	650	1860
15271680	3	1000x600	1200	650	1860
15272680	3	1200x600	1400	650	1860
15273680	3	1230x600	1430	650	1860
15274680	3	1400x600	1600	650	1860
15276680	3	1600x600	1800	650	1860
15271880	3	1000x800	1200	850	1860
15272880	3	1200x800	1400	850	1860
15273880	3	1230x800	1430	850	1860
15274880	3	1400x800	1600	850	1860
15276880	3	1600x800	1800	850	1860



PARCEL TROLLEY

The ends and shelves are reinforced to withstand loads up to 500 kg. The uprights are held together by a top element. Side gates are easily opened. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed wheels and two swivel wheels with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15861680	1	1000x600	1200	650	1180
15862680	1	1200x600	1400	650	1180
15864680	1	1400x600	1600	650	1180
15866680	1	1600x600	1800	650	1180
15862880	1	1200x800	1400	850	1180
15864880	1	1400x800	1600	850	1180
15866880	1	1600x800	1800	850	1180



PLATFORM TROLLEY

The ends and shelves are reinforced to withstand loads up to 500 kg. The end uprights are held together by a top element. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed wheels and two swivel wheels with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15540680	1	800x600	1000	650	1180
15541680	1	1000x600	1200	650	1180
15542680	1	1200x600	1400	650	1180
15544680	1	1400x600	1600	650	1180
15546680	1	1600x600	1800	650	1180
15541880	1	1000x800	1200	850	1180
15542880	1	1200x800	1400	850	1180
15544880	1	1400x800	1600	850	1180
15546880	1	1600x800	1800	850	1180



Model 54 – one end panel, detachable tubular frame on back. Can only have towing device at one end.

Model 55 – two end panels

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15550680	1	800x600	1000	650	1180
15551680	1	1000x600	1200	650	1180
15552680	1	1200x600	1400	650	1180
15554680	1	1400x600	1600	650	1180
15556680	1	1600x600	1800	650	1180
15551880	1	1000x800	1200	850	1180
15552880	1	1200x800	1400	850	1180
15554880	1	1400x800	1600	850	1180
15556880	1	1600x800	1800	850	1180

CUSTOM SOLUTIONS

Should you not find a trolley that suits your needs, please contact us. We are the specialists in internal material handling that can, and want to customize the trolleys according to your wishes.

ERGONOMIC TOWING DEVICE

QUICKE

With the towing device Quicke, the tow bar is mounted forwards and is connected from below. With an easy touch with the foot you connect and disconnect the trolley. This makes Quicke one of our most ergonomic towing devices.





QUICKE TOWING DEVICE

The tow bar spring and stays in an upright position. Coupled and disconnected from the tow hook with a slight pressure with the foot.

Art. no.	Type of trolley	Shelf dim.
15273681	Shelf trolley quicke	1230x600
15273881	Shelf trolley quicke	1230x800
15862681	Parcel trolley quicke	1200x600
15862881	Parcel trolley quicke	1200x800

ACCESSORIES – TROLLEYS FOR TOWING TRACTORS



MEMO BOARD

With document clip. Type 1 is mounted with clips, type 2 is mounted with an adjustable holder. Pen tray at top. Portrait A4.

Art. no.	Description
12200220	Type 1 with clip
12212220	Type 2 with adjustable holder



PROTECTIVE EDGING STRIP

An edging strip that can be mounted on trolleys to protect them and prevent them from hooking onto each other. The strip is 33 mm and increases the trolley width by 25 mm per side.

Art. no.	For shelf length
12253200	800 mm
12253210	1000 mm
12253220	1200 mm
12253240	1400 mm
12253260	1600 mm



EXTRA SHELVES MODELS 25 & 27

Grey 12 mm laminate panel. Profiles and mounting parts included.

Art. no.	Shelf dim.
12252406	800x600
12252416	1000x600
12252426	1200x600
12252436	1230x600
12252446	1400x600
12252466	1600x600
12252418	1000x800
12252428	1200x800
12252438	1230x800
12252448	1400x800
12252468	1600x800



TRUCK FORK GUIDE

For handling trolleys from long side. One pair to one trolley for mounting on both sides.



GRID RAIL

Easy to mount and dismantle. Mesh size: 30x30 mm. Height: 161 mm.

Art. no.	For shelf length
12212163	800 mm
12212165	1000 mm
12212168	1200 mm + 1230 mm
12212169	1400 mm
12212170	1600 mm



SHELF PARTITION

Easy to move and remove. Wire distance: 34 mm. Cannot be mounted on chassis shelf. Fits trolleys with width of 600 mm.

Art. no.	Dimensions
12200106	600x220
12200108	800x220



SIDE GRID

Easy to mount and dismantle. Mesh size: 65x50 mm. Height: 620 mm. Two grids are needed for trolleys with high ends.

Art. no.	For shelf length
12232142	800 mm
12212145	1000 mm
12212148	1200 mm + 1230 mm
12212149	1400 mm
12212150	1600 mm

EASY TO OPERATE IN NARROW SPACES

TROLLEYS FOR PICKING TRUCKS

All our trolleys have a capacity of 500 kg. With their excellent ergonomics and high quality, they help improve the profitability of companies that handle light goods in-house. Thanks to a wide range of wheel types, shelf sizes etc., the trolleys are extremely flexible and easy to adapt to the job at hand. By combining them with smart accessories, they can be customised to suit most needs.

A shelf edge and an end grid keep the load firmly in place at all times. Chassis of 22 mm round, shiny zinc-coated tubing. 12 mm shelves with light grey laminate finish. Continuously height-adjustable handles made of powder-coated 22 mm tubing.



NARROW AND PRACTICAL

The trolleys for truck 709 are only 600 mm wide, making them very practical in narrow aisles. Our unique docking system makes them easy to connect and disconnect. They have a load capacity of 500 kg. A shelf edge and end grid keep the load firmly in place.

The trolleys' application areas can easily be increased by adding our accessories (see accessories). Chassis of 22 mm

round, shiny zinc-coated tubing. Hard-wearing 12 mm shelves with light grey laminate finish. Shelves are continuously

height-adjustable.





SHELF TROLLEY 600 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. Lower shelf is recessed in the frame profile. Shelves reinforced with shelf supports. Upper shelves are continuously height-adjustable. Upper shelves have a 25x20 mm edge profile that creates a 10 mm high edge along the lateral sides. Max. load 500 kg. Lower shelf has a max. load of 500 kg. Upper shelves have a max. load of 150 kg.

Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs. Extra shelves can be added.

Model 25 – low ends, 2 shelves Model 27 – high ends, 3 shelves

Model 25					
Art. no.	Shelves	Shelf dim.	Length	Width	Height
15251690	2	1000x600	1050	650	1180
15253690	2	1230x600	1250	650	1180
15254690	2	1400x600	1450	650	1180

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15271690	3	1000x600	1050	650	1860
15273690	3	1230x600	1250	650	1860
15274690	3	1400x600	1450	650	1860

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15251685	2	1000x600	1050	650	1180
15253685	2	1230x600	1250	650	1180
15254685	2	1400x600	1450	650	1180

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15271685	3	1000x600	1050	650	1860
15273685	3	1230x600	1250	650	1860
15274685	3	1400x600	1450	650	1860





STEP TROLLEY 600 MM

Trolley with steps for picking and replenishment in warehouse and production facilities. The combined solution provides an efficient mobile workplace, facilitating order picking up to a height of 3 metres. The uprights are held together by a top element. The lower shelf is recessed in the frame profile. Fixed distance between shelves:

485 mm for 3-shelf trolley, 305 mm for 4-shelf trolley. Max. load 500 kg. Max. load, shelves: 150 kg. Max. load, product resting shelf: 40 kg. Two fixed docking wheels with tugs and two swivel wheels with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

3 shelves							
Art. no.	Shelves	Lower shelf	Mid shelf	Upper shelf	Length	Width	Height
15272695	3	1200x600	1064x600	914x600	1250	650	2230

4 shelves								
Art. no.	Shelves	Lowershelf	Mid shelf 1	Mid shelf 2	Upper shelf	Length	Width	Height
15272696	4	1200x600	1115x600	1015x600	914x600	1250	650	2230

REDUCED WALKING DISTANCE GIVES A MORE COST-EFFECTIVE BUSINESS

PICK-TRAIN


Designed to shorten the distance between the trolleys in a train. Improves ergonomics and shorten picking times by reducing the picker's walking distance. Up to two trolleys can be used in the train.





Pick-train is only to be used in combination with trolleys from Helge Nyberg AB and with our trucks.

Trolley number two in a pick-train-combination can not be in the docking system.

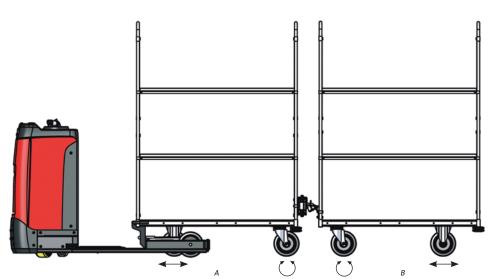





PLATFORM TROLLEY 600 MM

15544690

The ends and shelves are reinforced to withstand loads up to 500 kg. Each end panel has four sturdy uprights. The end uprights are held together by a top element. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed docking wheels with tugs and two

 Model 54

 Art. no.
 Shelves
 Shelf dim.
 Length
 Width
 Height

 15541690
 1
 1000x600
 1050
 650
 1180

 15542690
 1
 1200x600
 1250
 650
 1180

650

1450

1180

1400x600

swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Model 54 – one end panel, detachable tubular frame on back Model 55 – two end panels

Modell 55					
Art. no.	Shelves	Shelf dim.	Length	Width	Height
15551690	1	1000x600	1050	650	1180
15552690	1	1200x600	1250	650	1180
15554690	1	1400x600	1450	650	1180



PARCEL TROLLEY 600 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. The uprights are held together by a top element. Side gates are easily opened. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15861690	1	1000x600	1050	650	1180
15862690	1	1200x600	1250	650	1180
15864690	1	1400x600	1450	650	1180

ACCESSORIES – TROLLEYS FOR PICKING TRUCKS MODEL 709



MEMO BOARD

With document clip. Type 1 mounted with clips, type 2 mounted with adjustable holder. Pen tray at top. Portrait A4.

Art. no.	Description
12200220	Type 1 with clip
12212220	Type 2 with adjustable holder



GRID RAIL

Easy to mount and dismantle. Mesh size: 30x30 mm. Height: 161 mm.

t. no. For shelf length
212165 1000 mm
212168 1200 mm + 1230 mn



Dimensions

12200106 600x220

SHELF PARTITION

Easy to move and remove. Wire distance: 34 mm. Cannot be mounted on chassis shelf. Fits trolleys with width of 600 mm.



PICK-TRAIN CONNECTION

Designed to shorten the distance between the load carriers in a train. Improves ergonomics and shortens picking times by reducing the picker's walking distance. Up to two load carriers can be used in the train.



SIDE GRID

Easy to mount and dismantle. Mesh size: 65×50 mm. Height: 620 mm. Two grids are needed for trolleys with high ends.

Art.	no.	For shelf length
12212	2145	1000 mm
12212	2148	1200 mm + 1230 mm
12212	2149	1400 mm



EXTRA SHELVES FOR MODELS 25 & 27

Grey 12 mm laminate panel. Profiles and mounting parts included.

Art. no.	Shelf dim.
12252416	1000x600
12252426	1200x600
2252936	1230x600
2252446	1400x600

QUICK & EASY COUPLING

The trolleys for truck 710 are 800 mm wide. Our unique docking system makes them easy to connect and disconnect. They have a load capacity of 500 kg. A shelf edge and end grid keep the load firmly in place. The trolleys' application areas can easily be increased by adding our accessories (see accessories). Chassis of 22 mm round, shiny zinc-coated tubing. Hard-wearing 12 mm shelves with light grey laminate finish. Shelves are continuously height-adjustable.





SHELF TROLLEY 800 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. The end uprights are held together by a top element. Lower shelf is recessed in the frame profile. Upper shelves are continuously height-adjustable. Upper shelves have a 12x20 mm edge profile creating a 10 mm high edge along the lateral sides. Max. load: 500 kg. Max. load, upper

shelves: 150 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs. Extra shelves can be added.

Model 25 – low ends, 2 shelves

Model 27 – high ends, 3 shelves

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15251890	2	1000x800	1050	850	1180
15252890	2	1230x800	1250	850	1180
15254890	2	1400x800	1450	850	1180

model 25 pic	k-train connec	tion			
Art. no.	Shelves	Shelf dim.	Length	Width	Height
15251885	2	1000x800	1050	850	1180
15252885	2	1230x800	1250	850	1180
15254885	2	1400x800	1450	850	1180

Model 27					
Art. no.	Shelves	Shelf dim.	Length	Width	Height
15271890	3	1000x800	1050	850	1860
15272890	3	1230x800	1250	850	1860
15274890	3	1400x800	1450	850	1860

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15271885	3	1000x800	1050	850	1860
15272885	3	1230x800	1250	850	1860
15274885	3	1400x800	1450	850	1860





STEP TROLLEY 800 MM

Trolley with steps for picking and replenishment in warehouse and production facilities. The combined solution provides an efficient mobile workplace, facilitating order picking up to a height of 3 metres. The uprights are held together by a top element. Upper shelves have a 25x20 mm edge profile. The lower shelf is recessed

in the frame profile. Fixed distance between shelves: 485 mm for 3-shelf trolley, 305 mm for 4-shelf trolley. Max. load 500 kg. Max. load, shelves: 150 kg. Max. load, product resting shelf: 40 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

3 shelves							
Art. no.	Shelves	Lower shelf	Mid shelf	Upper shelf	Length	Width	Heigh
15272895	3	1200x800	1064x800	914x800	1250	850	2230

4 shelves								
Art. no.	Shelves	Lower shelf	Mid shelf 1	Mid shelf 2	Upper shelf	Length	Width	Height
15272896	4	1200x800	1115x800	1015x800	914x800	1250	850	2230





PLATFORM TROLLEY 800 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. Each end panel has four sturdy uprights. The end uprights are held together by a top element. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed docking wheels with tugs and two swivel

g. wheels, all with grey elastic rubber tyres measuring 200x50 mm,d ball bearing hubs.

Model 54 – one end panel, detachable tubular frame on back Model 55 – two end panels

Art. no.	Shelves	Shelf dim.	Length	Width	Heigh
15541890	1	1000x800	1050	850	1180
15542890	1	1200x800	1250	850	1180
15544890	1	1400x800	1450	850	1180

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15551890	1	1000x800	1050	850	1180
15552890	1	1200x800	1250	850	1180
15554890	1	1400x800	1450	850	1180



PARCEL TROLLEY 800 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. The uprights are held together by a top element. Side gates are easily opened. The shelf is recessed in the frame profile. Max. load 500 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs.

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15861890	1	1000x800	1050	850	1180
15862890	1	1200x800	1250	850	1180
15864890	1	1400x800	1450	850	1180

ACCESSORIES – TROLLEYS FOR PICKING TRUCKS MODEL 710



MEMO BOARD

With document clip. Type 1 mounted with clips, type 2 mounted with adjustable holder. Pen tray at top. Portrait A4.

Art. no.	Description
12200220	Type 1 with clip
12212220	Type 2 with adjustable holder



PICK-TRAIN

Designed to shorten the distance between the load carriers in a train. Improves ergonomics and shortens picking times by reducing the picker's walking distance. Up to two load carriers can be used in the train.



SHELF PARTITION

Easy to move and remove. Wire distance: 34 mm. Cannot be mounted on chassis shelf. Fits trolleys with width of 600 mm



GRID RAIL

Easy to mount and dismantle. Mesh size: 30x30 mm. Height: 161 mm.

Art. no.	For shelf length
12212165	1000 mm
12212168	1200 mm + 1230 mm



SIDE GRID

Easy to mount and dismantle. Mesh size: 65x50 mm. Height: 620 mm. Two grids are needed for trolleys with high ends.

Art. no.	For shelf length
12212145	1000 mm
12212148	1200 mm + 1230 mm
12212149	1400 mm



EXTRA SHELVES FOR MODELS 25 & 27

Grey 12 mm laminate panel. Profiles and mounting parts included.

Art. no.	Shelf dim.
12252418	1000x800
12252428	1200x800
12252438	1230x800
12252448	1400x800

WIDE - BUT NARROW ENOUGH

With a width of 1230 mm, the trolleys for truck 713 are perfect for driving in narrow aisles where slightly more loading room is needed. Our unique docking system makes them easy to connect and disconnect. They have a load capacity of 500 kg. A shelf edge and end grid keep the load firmly in place. The trolleys' application areas can easily be increased by adding our accessories (see accessories). Chassis of 22 mm round, shiny zinc-coated tubing. Hard-wearing 12 mm shelves with light grey laminate finish. Shelves are continuously height-adjustable.







SHELF TROLLEY 1230 MM

The ends and shelves are reinforced to withstand loads up to 500 kg. The end uprights are held together by a top element. Lower shelf is recessed in the frame profile. Upper shelves are continuously height-adjustable. Upper shelves have a 12x20 mm edge profile creating a 10 mm high edge along the lateral sides. Max. load: 500 kg. Max. load,

upper shelves: 150 kg. Two fixed docking wheels with tugs and two swivel wheels, all with grey elastic rubber tyres measuring 200x50 mm, ball bearing hubs. Extra shelves can be added. Model 25 – low ends, 2 shelves

Model 27 – high ends, 3 shelves

Model 25					
Art. no.	Shelves	Shelf dim.	Length	Width	Height
15253895	2	1230x800	850	1260	1180

Art. no.	Shelves	Shelf dim.	Length	Width	Height
15273895	3	1230x800	850	1260	1860

ACCESSORIES – FOR TROLLEYS, PICKING TRUCK MODEL 713



MEMO BOARD

With document clip. Type 1 mounted with clips, type 2 mounted with adjustable holder. Pen tray at top. Portrait A4.

Art. no.	Description
12200220	Type 1 with clip
12212220	Type 2 with adjustable holder



GRID RAIL

Easy to mount and dismantle. Mesh size: 30x30 mm. Height: 161 mm.



SIDE GRID

Easy to mount and dismantle. Mesh size: $65x50\,$ mm. Height: $620\,$ mm. Two grids are needed for trolleys with high ends.

Art. no.	For shelf length
12212148	1200 mm + 1230 mm



EXTRA SHELVES FOR MODELS 25 & 27

Grey 12 mm laminate panel. Profiles and mounting parts included.

Art. no.	Shelf dim.
12252438	1230x800
5-45-	,,



SHELF PARTITION

Easy to move and remove. Wire distance: 34 mm. Cannot be mounted on chassis shelf. Fits trolleys with width of 600 mm

Art. no.	Dimensions
12905182	800x220

TOWING DEVICES



TOW BAR BACKWARDS STANDARD

With the tow bar backwards, which is standard on our trolleys, you get better driving characteristics of up to 500 kg load. Hole diameter tow bar 23 mm, tow hook 22 mm.

Art. no.	Description
12253320	Tow bar
12253321	Tow hook



TOW BAR FORWARD

Available on all trolleys in our range. Please indicate when ordering. Hole diameter tow bar 23 mm, tow hook 22 mm.

Art. no.	Description
12253320	Tow bar
12253321	Tow hook



PICK-TRAIN

Designed to shorten the distance between the load carriers in a train. Improves ergonomics and shortens picking times by reducing the picker's walking distance. Up to two load carriers can be used in the train.

Art. no.	Width
12253406	600
12253408	800





QUICKE TOWING DEVICE

The tow bar spring and stays in an upright position. Coupled and disconnected from the tow hook with a slight pressure with the foot.

Art. no.	Description
12253385	Tow bar
12253387	Tow hook




TOW BAR FOR BT HAND PALLET TRUCK

For towing with autotruck or tow truck. Max. load 500 kg. Tow bar can remain attached during manual operation.

Art. no.	Description
12260589	Starting with serial no. 3 300 000
12260585	Even serial no. 3 299 999

WHEEL CONFIGURATIONS

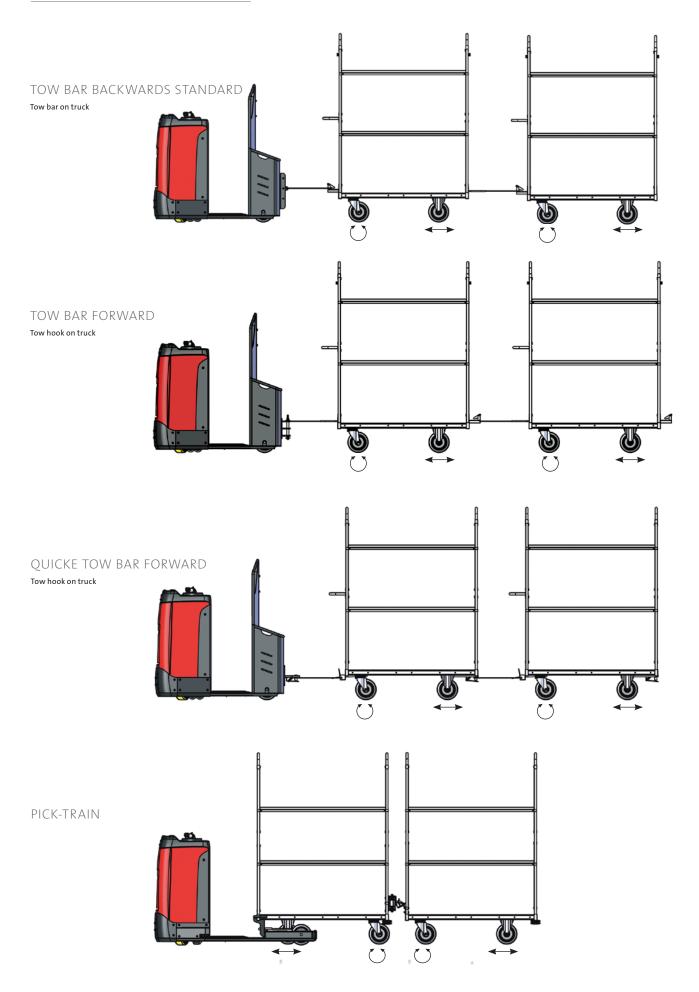

SINCE 1958, Helge Nyberg AB has been developing and manufacturing trolleys and light electric trucks under the name of Ergobjörn for in-house material handling. As specialists, we rationalise the work and costs of warehouses and logistics in sectors including industrial manufacturing, health care, airports and e-commerce.

